



## CEE plugs and sockets for 380V DC

- Super compact 32A 380V DC.

### Description

The CEE plugs and sockets are compact, easy to install and IP 44 protected. A CEE socket installed below or above a rack makes the deployment of 380V DC as simple as any standard electric equipment.

All our PDU's can be equipped with the CEE plugs in order to avoid bringing in a certified electrician when it's time to move a rack or make power upgrades.

### Features


- DC rated 380V
- 32A
- Plugs and couplers for cables
- Wall mount outlets
- Mounting plate outlets

### NOTE!

**The CEE plugs and socketse devices are are not rated for current rapture. Do not operate under load!**



	CEE 32A
<b>Electrical</b>	
Input voltage max	400 Vdc
Input current max	32A
	<b><u>Do not operate under load!</u></b>
<b>Wire size</b>	
Stranded wire	2,5-6 mm <sup>2</sup>
Solid wire	2,5-10 mm <sup>2</sup>
<b>Mechanical data</b>	
Clock position	8h
Plug diameter	63 mm
Plug length	146 mm
Coupler diameter	92 mm
Coupler length	159 mm
Enclosure	IP 44
Ambient temperature	0-50°C
<b>Standards</b>	
	EN/IEC 60950
	EN/IEC 60 309-1
	EN/IEC 60 309-2

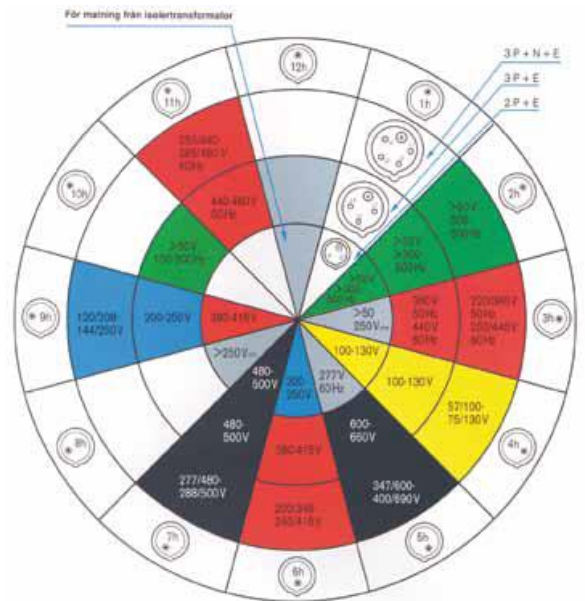

\*All data preliminary, subject to change.