



Rack PDU 380V DC 20 outlets Hi-Power version 11.4kW

- Compact “Zero U” design, LED indicator and DC rated fuses.

Description

The Rack PDU PDU2030 is a fused DC rated distribution unit with LED indicator, polarity indicator in one compact unit.


Output connectors are locked pluggable SAF-D-GRID connectors for safe cabling in tight rack spaces.

The PDU can be used in all versions of the standard ETSI EN 301 605 -Earthed negative, midpoint or high-ohmic.

Input is 3meter cable with DC rated CEE connector.

Features

- DC rated distribution outputs
- LED indicator
 - blown fuse
 - polarity error +/-
- Locked safety connection
- Compact 1U x 1U x 21U
- Designed for typical A + B redundancy installations

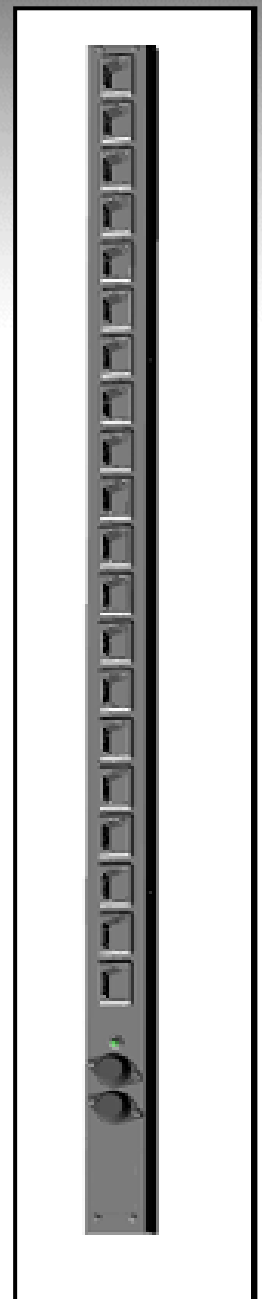

	PDU 2030
Input	
Input voltage range	300 – 400 Vdc
Input current	Max 30A
Overload protection	2x32A fuse
Output	
Output current -total	Max 30A
Output current (single output)	Max 7.5A
Number of outputs	20
Monitoring	
LED indicator (green)	Fuses OK
-"-	Polarity OK
Mechanical data	
Height	21U
Width	19 "
Depth	1U
Weight	3 kg
Enclosure	IP 20
Max ambient temperature	30°C
CE	
Safety	EN/IEC 60950, class 1
Grounding	ETSI EN 301 605

*All data preliminary, subject to change.

