



Rack PDU 380V DC 22 outlets

7.6kW (11.4kW in Hi-Power version)

- Compact “Zero U” design, LED indicator and DC rated fuse.

Description


The Rack PDU PDU2220 is a fused DC rated distribution unit with LED indicator, polarity indicator and surge protector in one compact unit.

Input and output connectors are pluggable SAF-D-GRID connectors for easy cabling in tight rack spaces. Two PDU's can be daisy-chained in order to get up to 43 outputs in a standard 42U rack.

Fuse in (+) line, intended for grounded negative (TN-S grounding)

Features

- 22 DC rated distribution outputs
- Pluggable input for easy installation/replacement
- LED indicator
 - blown fuse
 - polarity error +/-
- In and output connectors DC rated
- Locked safety connection
- Compact 1U x 1U x 21U
- Designed for typical A + B redundancy installations

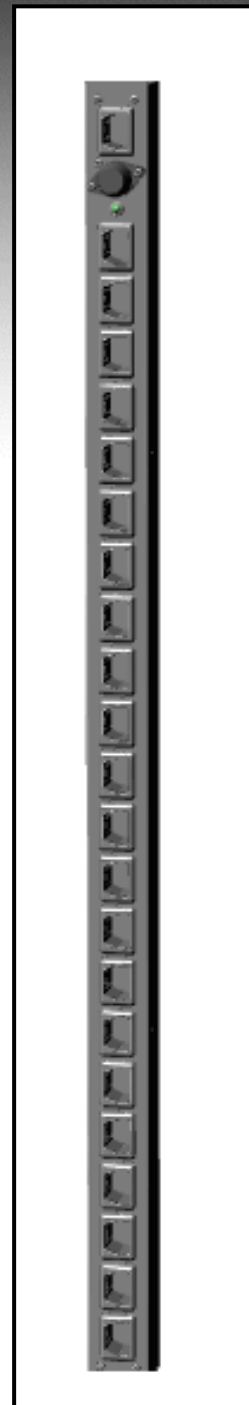

	PDU 2220
Input	
Input voltage nominal	380V DC
Input current	Max 20A (30A Hi-Power version)
Short circuit protection	20A fuse (+ line only)
-"- (Hi-Power version)	30A fuse (+ line only)
Output	
Output current -total	Max 20A (30A Hi-Power version)
Number of outputs	22
-two units daisy-chained	43
Monitoring	
Blown fuse	LED indicator
Wrong polarity +/-	-"-
Mechanical data	
Height	21U
Width	19 "
Depth	1U
Weight	2 kg
Enclosure	IP 20
CE	
Safety	EN/IEC 60950, class 1

