

CEE

DC plugs and sockets

Rugged, compact 32A 400V DC

Description

The CEE plugs and sockets are compact, easy to install and IP 44 protected. A CEE socket installed below or above a cabinet makes the deployment of DC as simple as any standard electric equipment.


All our PDU's can be equipped with the CEE plugs to avoid bringing in a certified electrician when it's time to move a cabinet or make power upgrades.

Features

- DC rated distribution outputs
- Spring loaded lid for protection
- Compact
- Well known industrial standard design



	CEE 32A
Electrical	
Input voltage max	400 Vdc
Input current max	32A
	<u>Do not operate under load!</u>
Wire size	
Stranded wire	2,5-6 mm ²
Solid wire	2,5-10 mm ²
Mechanical data	
Clock position	8h
Plug diameter	63 mm
Plug length	146 mm
Coupler diameter	92 mm
Coupler length	159 mm
Enclosure	IP 44
Ambient temperature	-35°C to +80°C (100°C 1h)
Standards	
	EN/IEC 60950
	EN/IEC 60 309-1
	EN/IEC 60 309-2

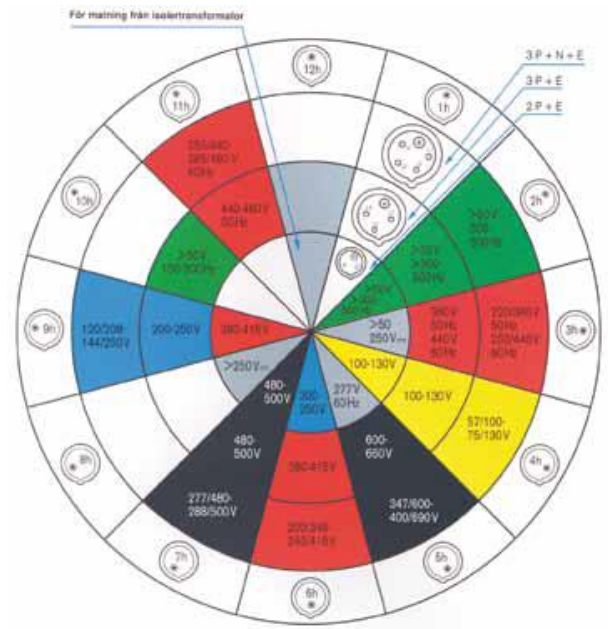

*All data preliminary, subject to change.

