

# Rack PDU

**Hi-Power version 12kW**  
**Compact "Zero U" design**  
**LED indicator and DC rated fuses**  
**20 outlets**

## Description

The Rack PDU 2030 is a fused, DC rated distribution unit with 20 outlets and LED indicator, all in one compact unit.


Output connectors are locked pluggable SAF-D-GRID connectors for safe cabling in tight rack spaces.

The PDU can be used in all versions of the direct current standard ETSI EN 301 605  
-Earthed negative, midpoint or high-ohmic grounding.

Input is 3meter cable with DC rated CEE connector.

## Features

- DC rated distribution outlets
- LED indicator, triple function
  - Power ON
  - Fuse OK
  - Polarity OK
- Locked safety connection
- Compact 1U x 1U x 21U
- Designed for typical A + B redundancy installations

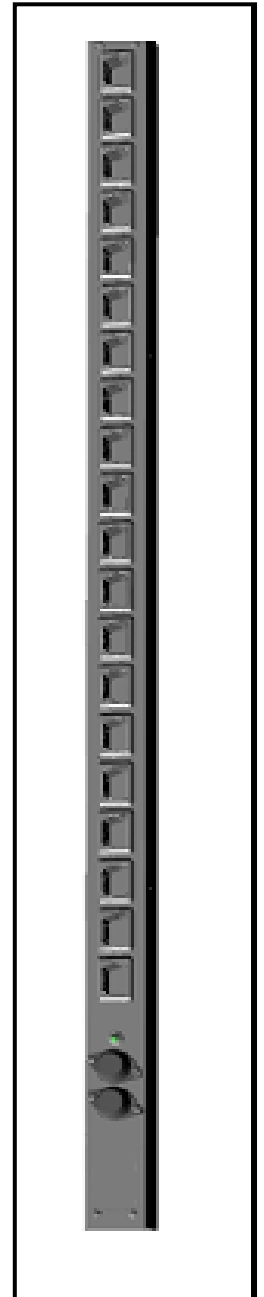

PDU 2030	
<b>Input</b>	
Input voltage range	200 - 400 Vdc
Input current	Max 32A
Overload protection	2x32A fuse
<b>Output</b>	
Output current -total	Max 32A
Output current (single output)	Max 20A
Number of outputs	20
<b>Monitoring</b>	
LED indicator (green)	Power ON
-"-	Fuses OK
	Polarity OK
<b>Mechanical data</b>	
Height	21U
Width	19"
Depth	1U
Weight	4 kg
Enclosure	IP 20
Max ambient temperature	55°C
<b>CE</b>	
Safety	EN/IEC 60950, class 1
Grounding	ETSI EN 301 605

\*All data preliminary, subject to change.

