


Rack PDU

Hi-Power version 12kW
19" design (horizontal or "Zero U")
LED indicator and DC rated fuses
8 outlets

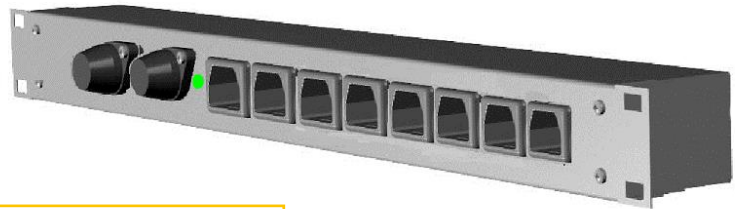

Description

The Rack PDU 830 is a fused, DC rated distribution unit with 8 outlets and LED indicator.

Output connectors are locked pluggable SAF-D-GRID connectors for safe cabling in tight rack spaces.

The PDU can be used in all versions of the direct current standard ETSI EN 301 605
-Earthed negative, midpoint or high-ohmic grounding.

Input is 3meter cable with DC rated CEE connector.

Features

- DC rated distribution outlets
- LED indicator, triple function
 - Power ON
 - Fuse OK
 - Polarity OK
- Locked safety connection
- Compact 1U (height and depth)
- Designed for typical A + B redundancy installations



PDU 830	
Input	
Input voltage range	200 - 400 Vdc
Input current	Max 32A
Overload protection	2x32A fuse
Output	
Output current -total	Max 32A
Output current (single output)	Max 20A
Number of outputs	8
Monitoring	
LED indicator (green)	Power ON
-"-	Fuses OK
	Polarity OK
Mechanical data	
Height	1U
Width	19"
Depth	1U
Weight	3 kg
Enclosure	IP 20
Max ambient temperature	55°C
CE	
Safety	EN/IEC 60950, class 1
Grounding	ETSI EN 301 605

*All data preliminary, subject to change.

